



# Accent your merchandise without distraction

PAR30L LED Single Optic lamp with AirFlux Technology

Philips PAR30L LED Retail Optic lamp with AirFlux Technology improves shopping experience with superior lighting aesthetics and optimal thermal efficiency in a sleek, lightweight design.

## Benefits

- Will not fade colors, avoids inventory spoilage
- Lowers maintenance costs by reducing re-lamp frequency
- 5-year limited warranty†

## Features

- Retail Optic reduces glare to improve shopper experience
- 25,000-hour rated average life\*
- 12W PAR30S saves 63 watts when compared to a 75W halogen PAR30L
- 83 CRI for excellent color rendering
- Virtually UV/IR free in the beam
- Smooth dimming to 5% of full light level‡
- Contains no mercury

## Warnings and Safety

- Suitable for use in damp locations.
- Not for use in totally enclosed luminaires.
- Before replacing, turn off power and let lamp cool to avoid electrical shock or burn.



**PHILIPS**

Related products




E26 120V PAR30L



11W E26 PAR30L

Dimensional drawing

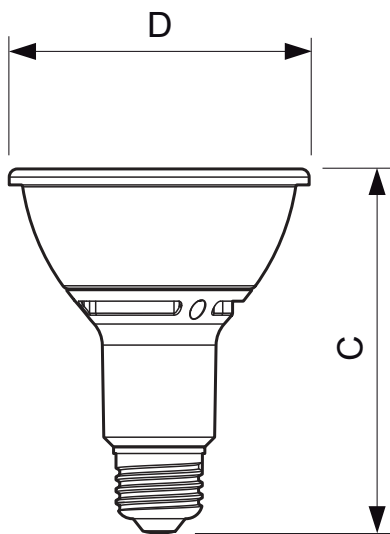

12PAR30L/F25 2700 DIM AF SO 6/1


Product	C (Norm)	C1 (Max)	D (Norm)	D1 (Norm)
LED 12-75W E26 2700K 120V PAR30L 25D DIM	116	-	92	-
LED 12-75W E26 3000K 120V PAR30L 25D DIM	116	-	92	-
LED 12-75W E26 4000K 120V PAR30L 25D DIM	116	-	92	-
LED 12-75W E26 2700K 120V PAR30L 36D DIM	116	-	92	-
LED 12-75W E26 3000K 120V PAR30L 36D DIM	116	-	92	-
LED 12-75W E26 4000K 120V PAR30L 36D DIM	116	-	92	-
LED 11-75W E26 2700K 120V PAR30L 25D DIM	112	-	92	-
LED 11-75W E26 3000K 120V PAR30L 25D DIM	112	-	92	-
LED 11-60W E26 2700K 120V PAR30L 36D DIM	112	-	92	-
LED 11-60W E26 3000K 120V PAR30L 36D DIM	112	-	92	-

General Characteristics

Product number	Full product name	Cap-Base	Bulb	Rated Avg. Life (Hours)	Rated Lifetime (years)
430124	12PAR30L/F25 2700 DIM AF SO 6/1	E26	PAR30L	50000 hr	45.7 an
430132	12PAR30L/F25 3000 DIM AF SO 6/1	E26	PAR30L	50000 hr	45.7 an
430140	12PAR30L/F25 4000 DIM AF SO 6/1	E26	PAR30L	50000 hr	45.7 an
430157	12PAR30L/F36 2700 DIM AF SO 6/1	E26	PAR30L	50000 hr	45.7 an
430165	12PAR30L/F36 3000 DIM AF SO 6/1	E26	PAR30L	50000 hr	45.7 an
430173	12PAR30L/F36 4000 DIM AF SO 6/1	E26	PAR30L	50000 hr	45.7 an

Product number	Full product name	Cap-Base	Bulb	Rated Avg. Life (Hours)	Rated Lifetime (years)
430942	11PAR30L/F25 2700 DIM AF 6/1	E26	PAR30L	45000 hr	41.1 an
430958	11PAR30L/F25 3000 DIM AF 6/1	E26	PAR30L	45000 hr	41.1 an
430974	11PAR30L/F36 2700 DIM AF 6/1	E26	PAR30L	45000 hr	41.1 an
430982	11PAR30L/F36 3000 DIM AF 6/1	E26	PAR30L	45000 hr	41.1 an

Installation diagrams




E26


Light Technical Characteristics

Product number	Full product name	Color Code	Beam Angle	Beam Description	Approximate Lumens	Approx. MBCP	CRI	Color Temp. (Kelvin)	Rated Luminous Flux
430124	12PAR30L/F25 2700 DIM AF SO 6/1	WH	25 D	25D	850 Lm	5000 cd	80	2700 K	850 Lm
430132	12PAR30L/F25 3000 DIM AF SO 6/1	WH	25 D	25D	900 Lm	5300 cd	80	3000 K	900 Lm
430140	12PAR30L/F25 4000 DIM AF SO 6/1	WH	25 D	25D	950 Lm	5500 cd	82	4000 K	950 Lm
430157	12PAR30L/F36 2700 DIM AF SO 6/1	WH	36 D	36D	850 Lm	2400 cd	80	2700 K	850 Lm
430165	12PAR30L/F36 3000 DIM AF SO 6/1	WH	36 D	36D	900 Lm	2500 cd	80	3000 K	900 Lm
430173	12PAR30L/F36 4000 DIM AF SO 6/1	WH	36 D	36D	950 Lm	2700 cd	82	4000 K	950 Lm
430942	11PAR30L/F25 2700 DIM AF 6/1	WW	25 D	25D	720 Lm	3200 cd	80	2700 K	720 Lm
430958	11PAR30L/F25 3000 DIM AF 6/1	WH	25 D	25D	750 Lm	3200 cd	81	3000 K	750 Lm
430974	11PAR30L/F36 2700 DIM AF 6/1	WW	36 D	36D	720 Lm	1512 cd	80	2700 K	720 Lm
430982	11PAR30L/F36 3000 DIM AF 6/1	WH	36 D	36D	750 Lm	1512 cd	81	3000 K	750 Lm


Light technical

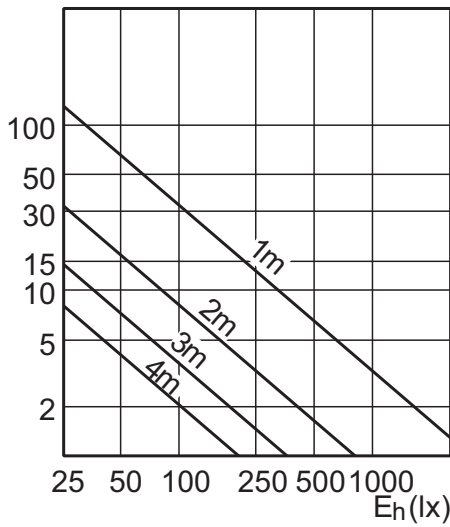


11-75W E26 2700K PAR30L 25D

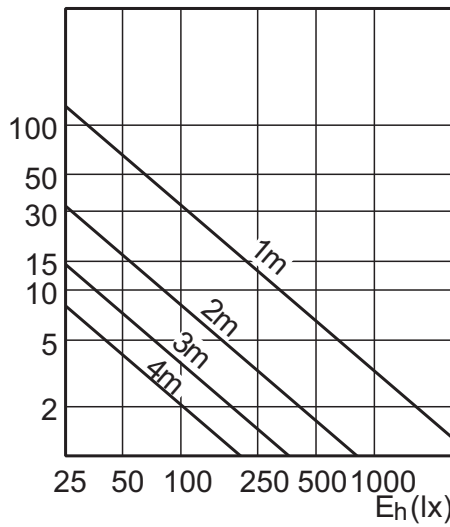


11-75W E26 3000K PAR30L 25D

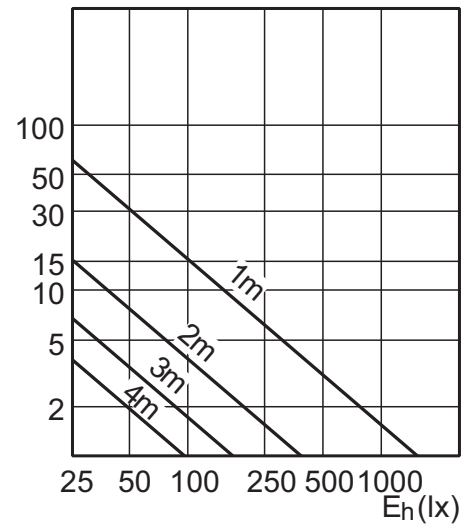


11-60W E26 2700K PAR30L 36D

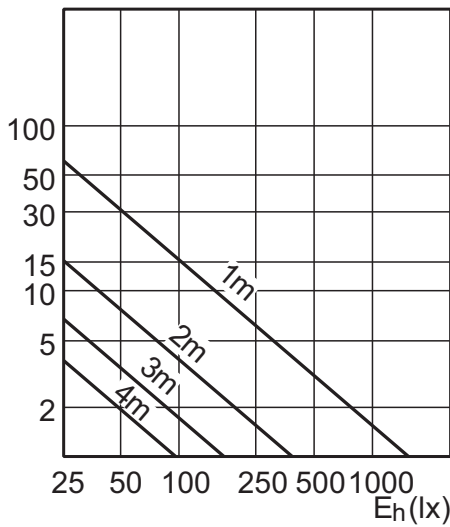


11-60W E26 3000K PAR30L 36D

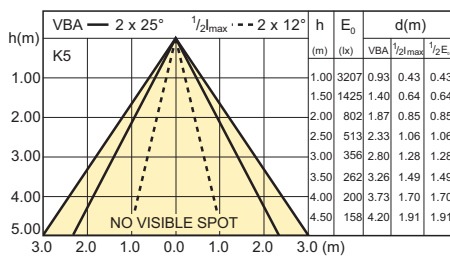

11-75W E26 2700K PAR30L 25D

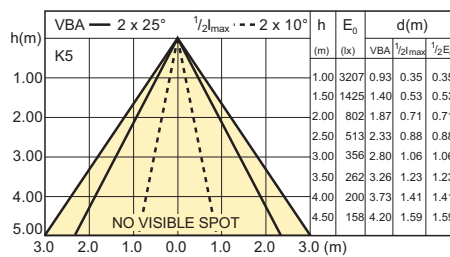


11-75W E26 3000K PAR30L 25D

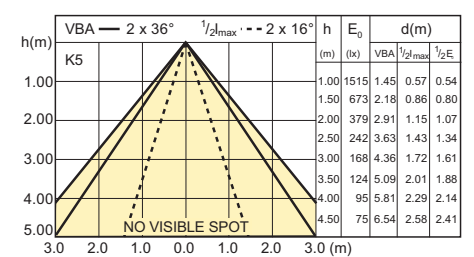


11-60W E26 2700K PAR30L 36D


Light technical

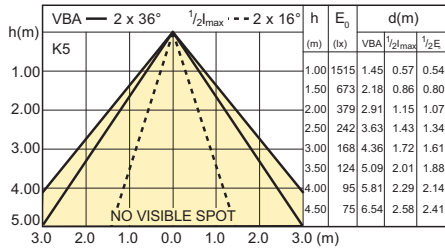


11-60W E26 3000K PAR30L 36D

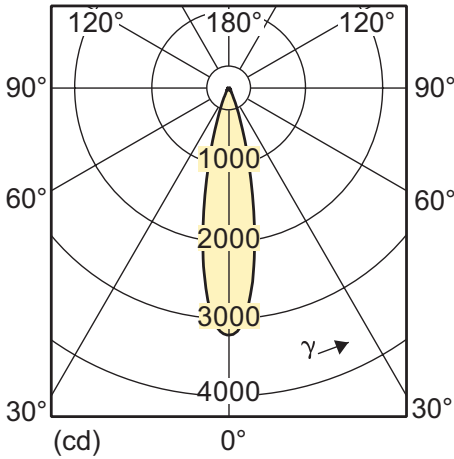


11-75W E26 2700K PAR30L 25D

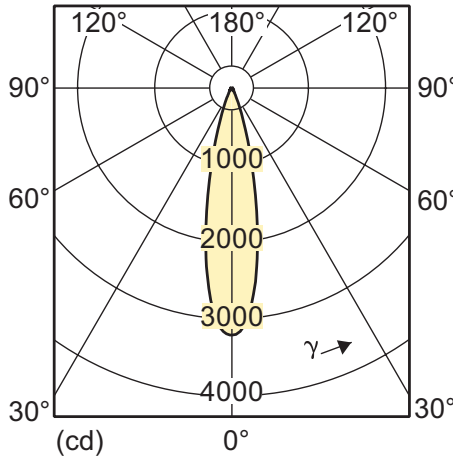

11-75W E26 3000K PAR30L 25D

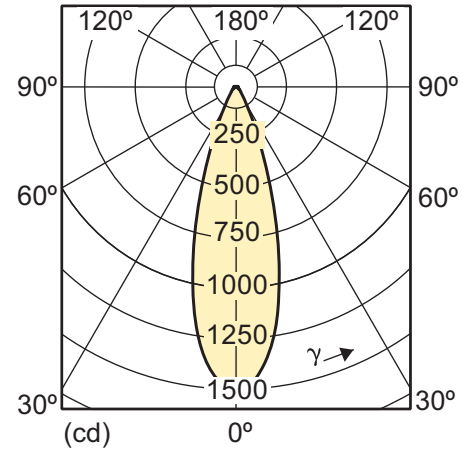

11-60W E26 2700K PAR30L 36D

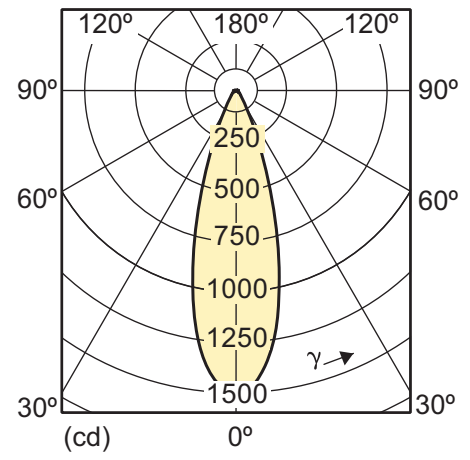

11-60W E26 3000K PAR30L 36D

Electrical Characteristics

Product number	Full product name	Wattage	Voltage	Line Frequency	Dimmable	Wattage Equivalent	Starting Time
430124	12PAR30L/F25 2700 DIM AF SO 6/1	12 W	120 V	60 Hz	Yes	75 W	0.5 s
430132	12PAR30L/F25 3000 DIM AF SO 6/1	12 W	120 V	60 Hz	Yes	75 W	0.5 s
430140	12PAR30L/F25 4000 DIM AF SO 6/1	12 W	120 V	60 Hz	Yes	75 W	0.5 s
430157	12PAR30L/F36 2700 DIM AF SO 6/1	12 W	120 V	60 Hz	Yes	75 W	0.5 s
430165	12PAR30L/F36 3000 DIM AF SO 6/1	12 W	120 V	60 Hz	Yes	75 W	0.5 s
430173	12PAR30L/F36 4000 DIM AF SO 6/1	12 W	120 V	60 Hz	Yes	75 W	0.5 s
430942	11PAR30L/F25 2700 DIM AF 6/1	11 W	120 V	60 Hz	Yes	75 W	0.5 (max) s
430958	11PAR30L/F25 3000 DIM AF 6/1	11 W	120 V	60 Hz	Yes	75 W	0.5 (max) s

Product number	Full product name	Wattage	Voltage	Line Frequency	Dimmable	Wattage Equivalent	Starting Time
430974	11PAR30L/F36 2700 DIM AF 6/1	11 W	120 V	60 Hz	Yes	60 W	0.5 (max) s
430982	11PAR30L/F36 3000 DIM AF 6/1	11 W	120 V	60 Hz	Yes	60 W	0.5 (max) s

## Measuring Conditions

Product number	Full product name	Switching cycle
430124	12PAR30L/F25 2700 DIM AF SO 6/1	20000x
430132	12PAR30L/F25 3000 DIM AF SO 6/1	20000x
430140	12PAR30L/F25 4000 DIM AF SO 6/1	20000x
430157	12PAR30L/F36 2700 DIM AF SO 6/1	20000x
430165	12PAR30L/F36 3000 DIM AF SO 6/1	20000x

Product number	Full product name	Switching cycle
430173	12PAR30L/F36 4000 DIM AF SO 6/1	20000x
430942	11PAR30L/F25 2700 DIM AF 6/1	50000x
430958	11PAR30L/F25 3000 DIM AF 6/1	50000x
430974	11PAR30L/F36 2700 DIM AF 6/1	50000x
430982	11PAR30L/F36 3000 DIM AF 6/1	50000x



© 2014 Koninklijke Philips N.V. (Royal Philips)  
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips N.V. (Royal Philips) or their respective owners.

[www.philips.com/lighting](http://www.philips.com/lighting)

2014, January 10  
data subject to change